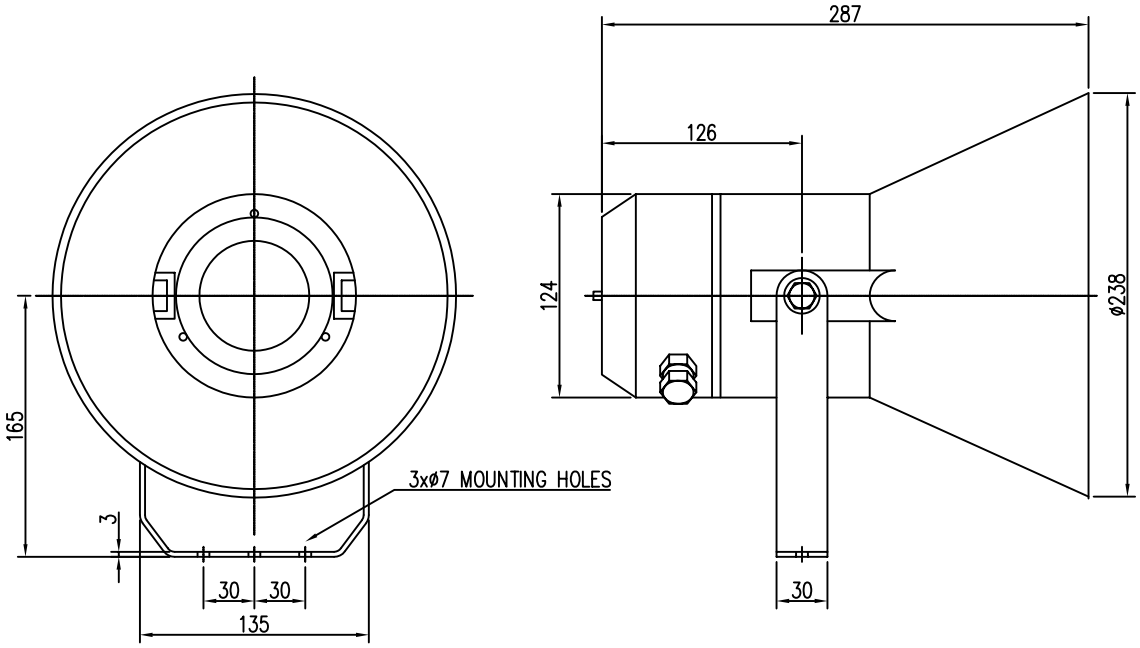

FRONT VIEW

SIDE VIEW

DESCRIPTION

WEATHERPROOF, LIGHTWEIGHT AND ROBUST. RESISTANT TO SALT LADEN AIR AND UNAFFECTED BY MOST CHEMICALS. IDEAL FOR MARINE AND INDUSTRIAL APPLICATIONS.

THE SOUNDER PROVIDES A CHOICE OF UP TO 64 TONES (50 STANDARD AND 14 CUSTOMISED) AND UP TO FOUR 8 SECOND VOICE MESSAGES. THE UNIT MAY BE CONFIGURED TO GIVE UP TO FOUR STAGES OF ALARM WITH ALL STAGES FULLY CUSTOMER PROGRAMMABLE, GIVING ANY COMBINATION OF TONE, VOICE/SOUND OR TONE + VOICE.

ALL OUTPUTS ARE SYNCHRONISED ON MULTI-SOUNDER SYSTEMS.

MODEL :

VOICETONE In21VT

SPECIFICATION :

VOLTAGE	: 16-36VDC (TONE ONLY : 12-36VDC)
CURRENT	: 400mA @ 24VDC (1000Hz)

N.B. A RANGE OF VOLTAGE CONVERTERS IS AVAILABLE FOR MAINS POWERED SYSTEMS

AUDIBILITY	: 107dB - 118dB SPL (3dB VOLUME CONTROL)
ALARM TONES	: SEE DRWG. NO. SS66100-68-001
RATING	: CONTINUOUS
OPERATING TEMP	: -25°C TO +70°C
MATERIAL	: • BODY - STRENGTHENED ABS UVL PROTECTION
	• BRACKET - EPOXY COATED STAINLESS STEEL
	• FIXINGS - STAINLESS STEEL
	• COLOUR - GREY
WEIGHT	: 2.2 KG
CABLE ENTRY	: 1 OR 2 x 20mmø
INGRESS PROTECTION	: IP66
TERMINALS	: 7 x 2.5mm^2

REV.	DATE	DESCRIPTION	DRAWN	CHCK'D
0	20. 10. 01	ISSUED FOR APPROVAL	S. A.	

HEAD OFFICE :
SEAGULL SAFETY LTD
45 CHESTNUT AVENUE
WOKINGHAM, BERKSHIRE
RG41 3HW, ENGLAND UNITED KINGDOM
Tel: 44-118-978 3978 Fax: 44-118-977 5261

REGIONAL OFFICE :
SEAGULL SAFETY (S) PTE LTD
1 GENTING LINK
#07-06 PERFECT INDUSTRIAL BUILDING
SINGAPORE 349518
Tel: (65) 747 9646 Fax: (65) 744 4028

THIS IS THE PROPERTY OF SEAGULL SAFETY LTD AND IS ONLY ISSUED ON CONDITION THAT NO COPY IS TAKEN OR REPRODUCTION OR DISCLOSURE TO A THIRD PARTY EITHER WHOLLY OR IN PART IS MADE WITHOUT THE WRITTEN CONSENT OF SEAGULL SAFETY LTD.

TITLE :
In21VT VOICETONE
INDUSTRIAL SOUNDER

DRAWN BY	SA	DATE:	20. 10. 2001
CHECKED BY	ANDREW	DATE:	
DRWG NO :	SS66100-66-201	REVISION	0