


# AIR HORN MODEL S888-024/120

OUTER DIAM. 1000mm

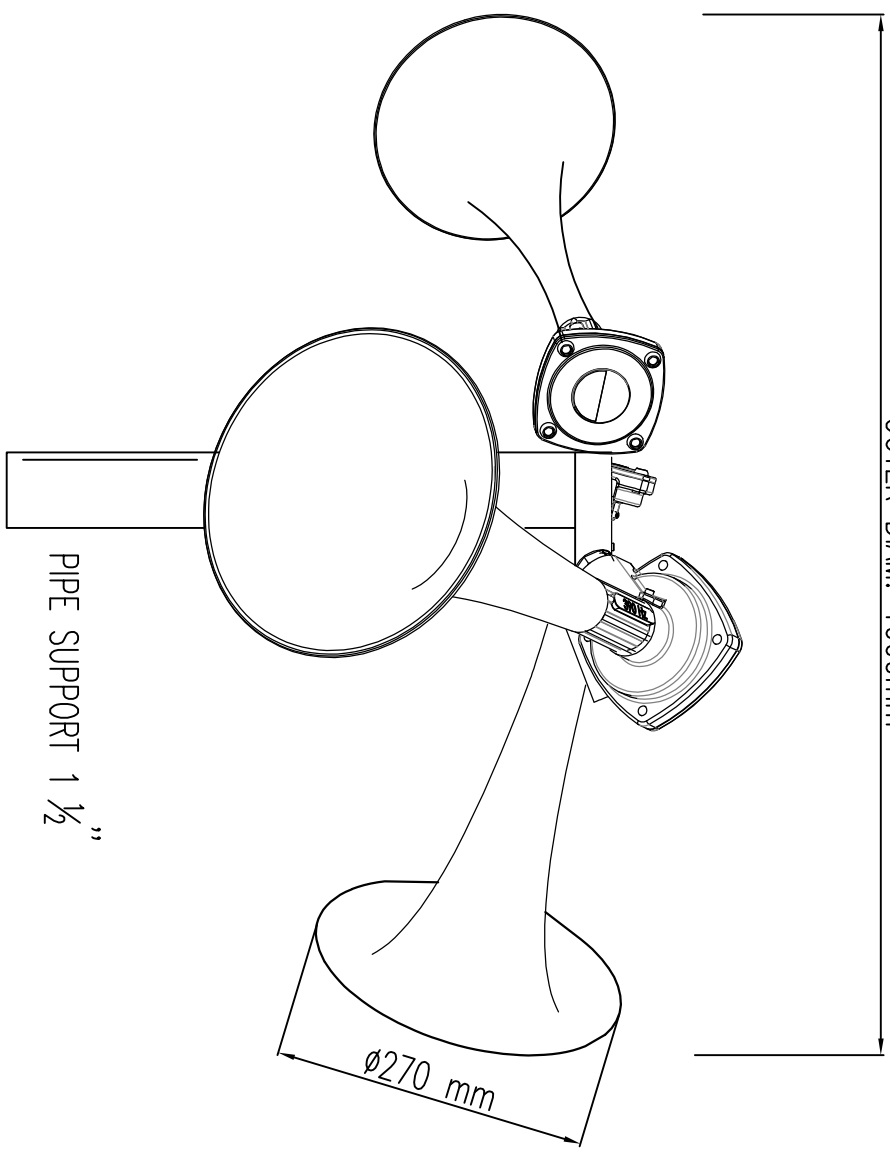

## TECHNICAL DATA

### ACOUSTICAL CHARACTERISTICS

**SOUND PRESSURE LEVEL (30m):** 120 dB ± 2 dB  
**SOUND PRESSURE LEVEL (1m):** 150 dB ± 2 dB  
**DIRECTIVITY:** OMNI DIRECTIONAL  
**FREQUENCIES (3 HORNS):** 300 + 320 + 340 HZ

### PNEUMATICS

**WORKING PRESSURE:** 0.35 - 1.0 MPa  
**NORMAL AIR CONSUMPTION, (FREE AIR):** 80-100 l/s  
**PIPE CONNECTOR, O.D./I.D.:** Ø 22/19 mm

### ENVIRONMENTAL CHARACTERISTICS

**SUITABLE STANDPIPE:** 1 1/2"  
**INTERIOR THREADS:** G 1 1/2"  
**SUITABLE SUPPLY TUBING:** 22 / 19 mm  
**MATERIAL OF HORN:** GLASS-FIBRE REINFORCED POLYESTER

**COLOUR OF HORN:** WHITE  
**MATERIAL HOUSING:** BRASS  
**OPERATING TEMPERATURE:** -40 °C TO +70 °C

### SIZE AND WEIGHT

**WIDTHS ACROSS HORNS:** 1000 mm  
**HORN DIAMETER:** 270 mm  
**WEIGHT:** 20 kg

REV. DATE		DESCRIPTION		DRAWN		CHECK'D	
0	15.08.12	ISSUED FOR APPROVAL		MM		A.D.	
<p>HEAD OFFICE : SEAGULL SAFETY LTD                  45 CHESTNUT AVENUE                  WOKINGHAM, BERKSHIRE                  RG41 3HW, ENGLAND UNITED KINGDOM                  Tel: 44-118-978 3978 Fax: 44-118-977 5261</p> <p>REGIONAL OFFICE : SEAGULL SAFETY (S) PTE LTD                  #07-06 PERFECT INDUSTRIAL BUILDING                  1 GENTING LINK                  SINGAPORE 349518                  Tel: (65) 6747 9646 Fax: (65) 6744 4028</p>							
<p>TITLE : AIR HORN MODEL S888-024/120                  GENERAL ASSEMBLY DRAWING</p>							
DRAWN BY		MM		DATE		15.08.12	
CHECKED BY		AD		DATE		16.08.12	
SCALE		NTS		ACAD REF			
DWG NO :		SS77100-160		REVISION		0	

THIS IS THE PROPERTY OF SEAGULL SAFETY LTD AND IS ONLY ISSUED ON CONDITION THAT NO COPY IS TAKEN OR REPRODUCTION OR DISCLOSURE TO A THIRD PARTY EITHER WHOLLY OR IN PART IS MADE WITHOUT THE WRITTEN CONSENT OF SEAGULL SAFETY LTD.

